


# Product specification

## MPS CX · Cooling module

Item No.: 10175020 230 V, 50 Hz  
 Item No.: 10177020 115 V, 60 Hz

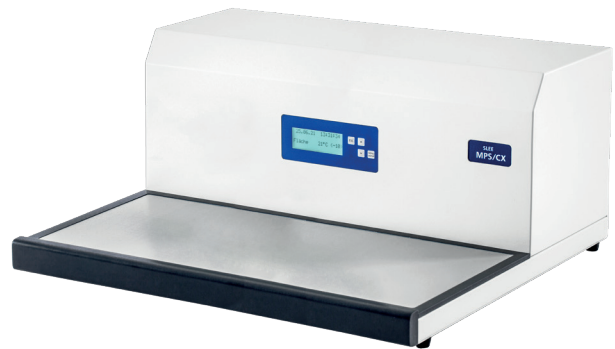

## Specifications

Nominal power:	230 V AC + 10%
Nominal frequency	50 / 60 Hz
Power:	250 W
Protective class:	(I) I
Fuses	2 x T 6.3 A
Pollution degree	(I) 2
Overvoltage protection category	II
Max. Heat emission	450 J/s
Operating temperature range	+10 to +35 °C
Operating humidity	max. rel. 80 % non-condensing
Storage temperature range	+5 to +55 °C
Storage humidity	max. rel. 80 % non-condensing
Dimensions [W x D x H]:	600 mm x 575 mm x 295 mm
Weight [w/o accessories]	30 kg
Temperature range	down to -15 °C
Cooling gas:	R 134 a
Work area	anodized aluminum 270 x 570 mm 120 cassettes

Hints for installation < 2000 m NN, 15 cm distance from backside to wall.

## Optional accessories

Transparent hood for cooling area MPS CX

Item No.

on demand

## Comments / additional information:

In case of further questions, please feel free to contact us at every time.

SLEE medical GmbH · Am Neuberg 14  
55268 Nieder-Olm · Germany  
[www.slee.de](http://www.slee.de)

T: +49 (0) 6136 76997-0  
M: [mail@slee.de](mailto:mail@slee.de)



[www.slee.de](http://www.slee.de)



[YouTube](#)



[LinkedIn](#)



[Instagram](#)